


MS-160 Accelerometer

AC Velocity Output


Cable and Connector Options

2 Pin MS (50)

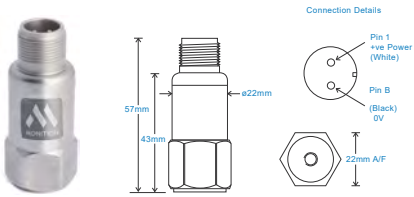


Cable/Connector	
Screened Cable Connector	see: www.monition.com for options MS- AA004 - non-booted MS-AA053 or MS-0054 - booted
Environmental	
Operating Temperature Range	-55 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

M12 Connector (54)

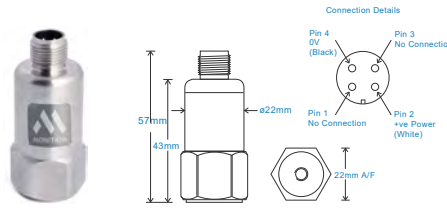


Cable/Connector	
Screened Cable	MS-AC010 - straight MS-AC011 - right angle
Environmental	
Operating Temperature Range	-55 to 140°C
Sealing	IP67
Maximum Shock	5000g
EMC	EN61326-1:2013

Braided Cable (02)

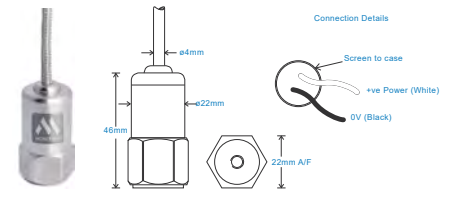


Cable/Connector	
Screened Cable	Braided
Maximum cable length	1000 metres
Standard cable length	5 metres
Environmental	
Operating Temperature Range	-55 to 140°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013

FEP Cable with Protective Conduit (30C)

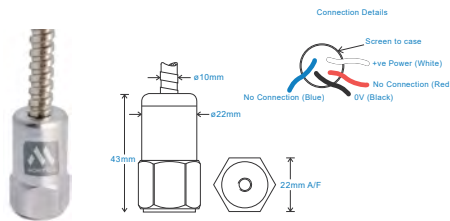


Cable/Connector	
Screened Cable	see: www.monition.com for options
Maximum cable length	1000 metres
Standard cable length	5 metres
Environmental	
Operating Temperature Range	-55 to 140°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013

Flame Retardant Cable (08)

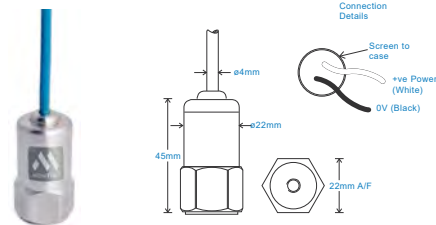


Cable/Connector	
Screened Cable	Flame Retardant
Maximum cable length	1000 metres
Standard cable length	5 metres
Environmental	
Operating Temperature Range	-40 to 100°C
Sealing	IP65
Maximum Shock	5000g
EMC	EN61326-1:2013

PUR Cable (01)

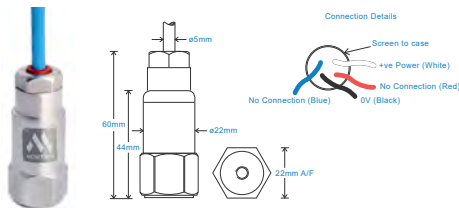

Cable/Connector	
Screened Cable	PUR
Maximum cable length	1000 metres
Standard cable length	5 metres
Environmental	
Operating Temperature Range	-30 to 90°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

Silicon Cable (07)

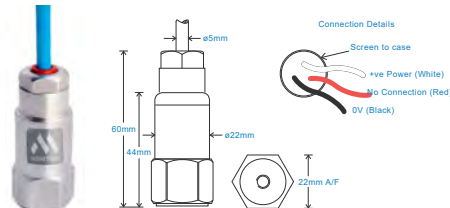

Cable/Connector	
Screened Cable	Silicon
Maximum cable length	1000 metres
Standard cable length	5 metres
Environmental	
Operating Temperature Range	-50 to 140°C
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table ±10% Nominal 80Hz at 22°C
Frequency Response	3Hz (180cpm) to 4.5kHz (270kcpm) ± 10% 2Hz (120cpm) to 6kHz (360kcpm) ± 3dB
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max (10 bar)



MS-160 Accelerometer

AC Velocity Output


Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	2 seconds
Output Impedance	200 Ohms max.
Case Isolation	>10 ⁸ Ohms at 500 Volts

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

Typical Frequency Response (at 100mV/g)

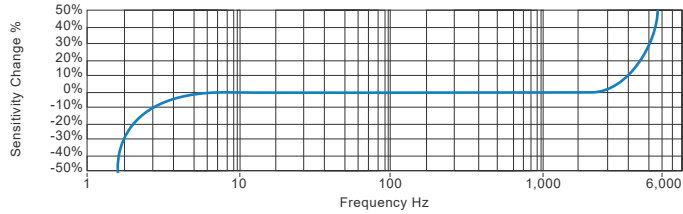


Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)

How To Order

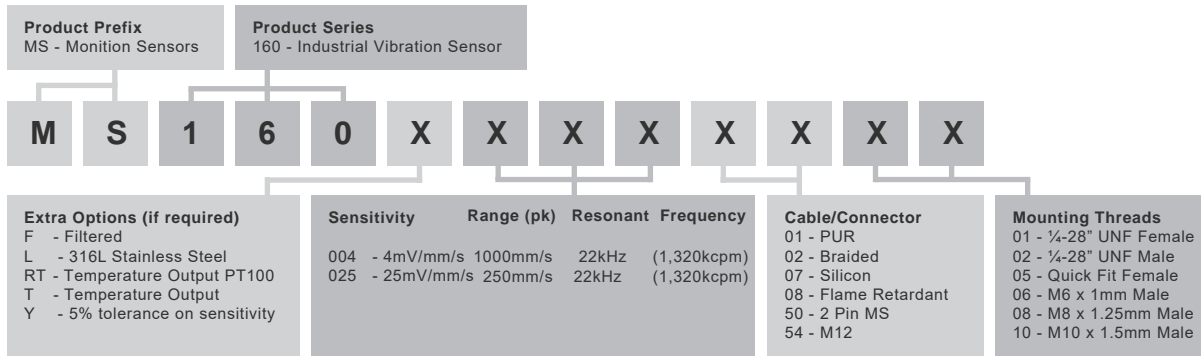

Please note: Always refer to the products full datasheet. This comprehensive product sheet cannot display every technical aspect.